Bobcat Pallet Fork, Floating 1.44m

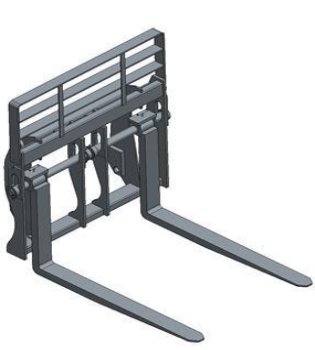

Description

Use this versatile attachment to lift, carry, stack or place all types of pallet materials even on rough and uneven surfaces in construction sites, municipal projects, industrial areas and farms. Floating forks are free to swing while remaining level with the ground, to avoid load spillage. Bobcat also offers you the choice of two frame widths – 1.12 m or 1.44 m – to suit your needs.

Requirements

No special requirement.

Features & Benefits

• Floating forks are free to swing while remaining level with the ground.
• Simplifies getting the fork tines into the pallet openings without having to adjust the tilt angle and height as much as with fixed forks.
• Comes as standard with forks and backrest (except for forks with JCB coupling).

Technical Specifications

Description	Coupling System	Frame Width (mm)	Capacity (kg)	Fork Length (mm)	Fork Width (mm)	Jaw Opening at Max. Open Height (cm)	Weight (kg)
Floating Pallet Forks, 1.44 m, QT (Assy)	QT	1440	4000	1200	100	76	310

Compatibility Chart

Telescopic Handlers										
TL358/+ TL26.60 TL30.60	TL30.70	TL360 TL34.65HF	TL470/HF TL35.70/ TL38.70HF	TL43.80HF	35105/L T35.105/L	T36120SL T36.120SL	35130S/SL T35.130S/ SLP	35140S T35.140S	T40140 T41.140SLP	T40180 T40.180SLP
X	X	X	X	X	X	X	X	X	X	X